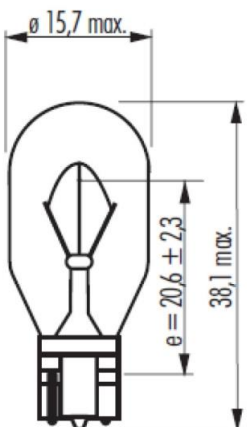


GENERAL

	W16W 12V 16W W2,1x9,5d	Features	softglass
	Ordering Number 37631	Standard	ECE R37
Product Description	Incandescent signalling lamp	Typical Applications	indicator, rear fog light, stop light, reversing light

TECHNICAL DETAILS

		Rated Voltage	ECE R37: 12V
		Rated Wattage	max. 21,35W @13,5V
Geometry Light center length: 20,6mm ± 2,3mm Bulb diameter: max. 15,7mm		Base	W2,1x9,5d
		Operating Conditions	burning position: horizontal
		Luminous Flux	310 lm ± 20% @13,5V
		Lifetime	B3: 250h @13,5V Tc: 700h @13,5V

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20x10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 12/04/2017

replace for 14.11.2014-V-PN14/0499

file 37631 - W16W 12V 16W W2,1x9,5d.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com