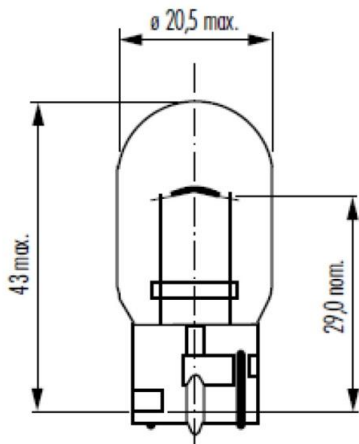


GENERAL

	W21W 12V 21W W3x16d	Features	softglass
	Ordering Number 37632	Standard	ECE R37
Product Description	Incandescent signalling lamp	Typical Applications	indicator, rear fog light, stop light, reversing light

TECHNICAL DETAILS

		Rated Voltage	ECE R37: 12V
		Rated Wattage	max. 26,5W @13,5V
		Base	W3x16d
		Operating Conditions	burning position: horizontal
		Luminous Flux	460 lm ± 15% @13,5V
Geometry	Light center length: 29mm Bulb diameter: max. 20,5mm	Lifetime	B3: 300h @14,0V Tc: 225h @14,0V

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 12/04/2017

replace for 14.11.2014-V-PN14/0499

file 37632 - W21W 12V 21W W3x16d.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com