
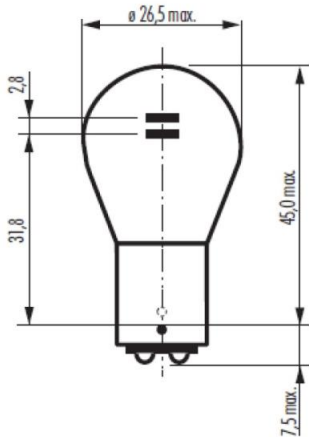


GENERAL

	Stop P25 24V 21/5W BA15d	Features	softglass
	Ordering Number 37927	Standard	not regulated
Product Description	Incandescent signalling lamp with double coil	Typical Applications	stop light

TECHNICAL DETAILS

	Rated Voltage	24V
	Rated Wattage	21W/5W @28,0V
Geometry Light center length: 31,8mm Bulb diameter: max. 26,5mm	Base	BA15d
	Operating Conditions	burning position: horizontal
	Luminous Flux	440 lm ±15% / 40 lm ± 20% @28,0V
	Lifetime	B3: 60/600h @28,0V Tc: 160/1600h @28,0V

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 28/05/2018

replace for 15.05.2018

file 37927 - Stop P25 24V 21/5W BA15d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.