




Railway Signaling

	Type RS6752 12V 24W BA22d / 25x26
	Ordering – No. 46752
Product Description	Signaling Lamp
Features	Single Filament
Applications	Railway Signal

Drawing (in mm)

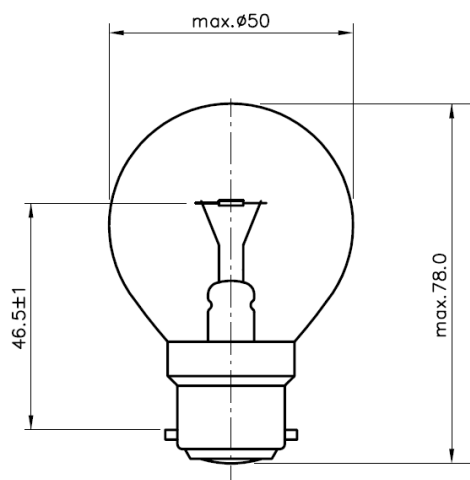

Technical Details

Type	RS6752
Rated Voltage (V)	12
Wattage (W) (at 12V)	max. 25,4
Luminous Flux (lm) (at 12V)	290 ± 10%
Lumen Maintenance (at 12V)	70% at 6000 h
Life B50 (h) (at 12V)	8000
Life B2 (h) (at 12V)	4000
Base	BA22d / 25x26
Maximum Overall Length (mm)	max. 78,0
Bulb Diameter (mm)	max. 50,0
Light Center Length (mm)	46,5 ± 1,0
Packaging Configuration	200
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

valid from	10.02.2014—V2—PN14/0072
replace for	28.01.2013—V1
file	46752.100.pdf