



Railway Signaling



Type RS6795
12V 50W BA20s

Ordering – No.
46795

Product Description

Signaling Lamp

Features

Single Filament

Applications

Railway Signal

Technical Details

Type RS6795

Rated Voltage (V) 12

Wattage (W) (at 12V) max. 55,0

Luminous Flux (lm) (at 12V) 710 ± 10%

Lumen Maintenance (at 12V) 80% at 300 h

Average Lifetime (h) (at 12V) 600

Base BA20s

Maximum Overall Length (mm) max. 67,0


Bulb Diameter (mm) max. 36,0

Light Center Length (mm) 29,6 ± 0,5

Packaging Configuration 200

Environmental Remark
Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

Drawing (in mm)

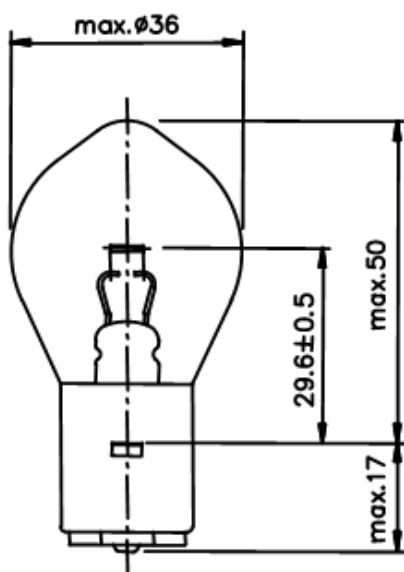

valid from	18.02.2014—V2—PN14/0072
replace for	28.01.2013—V1
file	46795.100.pdf