




Railway Signaling

|                                                                                   |                                           |
|-----------------------------------------------------------------------------------|-------------------------------------------|
|  | <b>Type RS6805</b><br><b>12V 6W BA20d</b> |
|                                                                                   | <b>Ordering – No.</b><br><b>46805</b>     |
| <b>Product Description</b>                                                        | Signaling Lamp                            |
| <b>Features</b>                                                                   | Single Filament                           |
| <b>Applications</b>                                                               | Railway Signal                            |

Technical Details

|                                |                                                                                                                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type                           | RS6805                                                                                                                                                                             |
| Rated Voltage (V)              | 12                                                                                                                                                                                 |
| Wattage (W) (at 0,5A)          | max. 6,6                                                                                                                                                                           |
| Luminous Flux (lm) (at 0,5A)   | 55 - 10%                                                                                                                                                                           |
| Lumen Maintenance (at 0,5A)    | 80% at 300 h                                                                                                                                                                       |
| Average Lifetime (h) (at 0,5A) | 600                                                                                                                                                                                |
| Base                           | BA20d                                                                                                                                                                              |
| Maximum Overall Length (mm)    | max. 67,0                                                                                                                                                                          |
| Bulb Diameter (mm)             | max. 36                                                                                                                                                                            |
| Light Center Length (mm)       | 29,6 ± 015                                                                                                                                                                         |
| Packaging Configuration        | 200                                                                                                                                                                                |
| Environmental Remark           | Product does not contain lead or mercury and is conform with Directive 2011/65/EC “Restriction of the use of certain hazardous substances in electrical and electronic equipment”. |

Drawing (in mm)

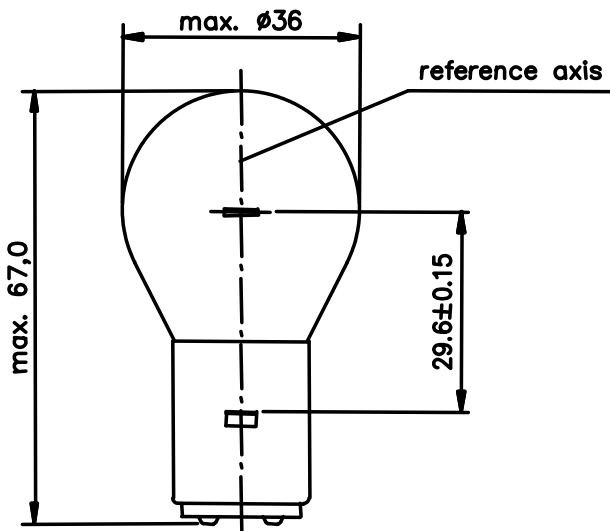

|             |                         |
|-------------|-------------------------|
| valid from  | 28.03.2024—V3—PN24/0087 |
| replace for | 18.02.2014—V2—PN14/0072 |
| file        | 46805.100.pdf           |