




Railway Signaling

	Type RS6806 12V 6W BA20s
	Ordering – No. 46806
Product Description	Signaling Lamp
Features	Single Filament
Applications	Railway Signal

Technical Details

Type	RS6806
Rated Voltage (V)	12
Wattage (W) (at 0,5A)	max. 6,6
Luminous Flux (lm) (at 0,5A)	55 – 5%
Lumen Maintenance (at 0,5A)	80% at 300 h
Average Lifetime (h) (at 0,5A)	600
Base	BA20s
Maximum Overall Length (mm)	max. 67,0
Bulb Diameter (mm)	max. 36,0
Light Center Length (mm)	29,6 ± 0,15
Packaging Configuration	200
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

Drawing (in mm)

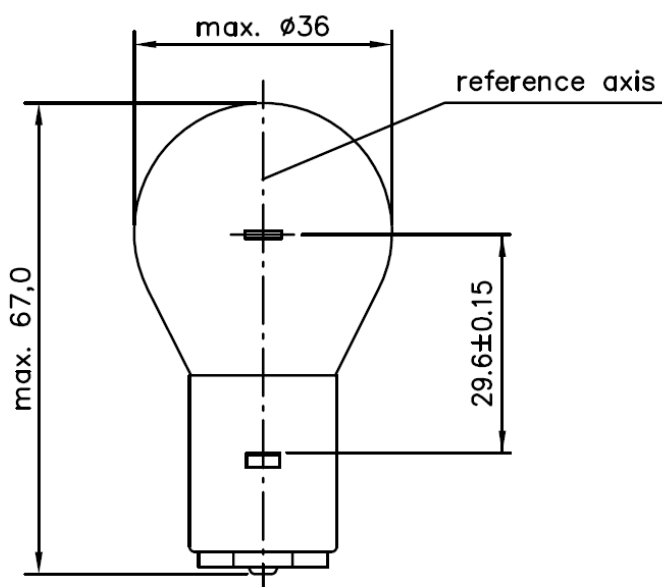

valid from	18.02.2014—V3—PN14/0072
replace for	07.10.2013—V2—PN13/0318
file	46806.100.pdf