




Railway Signaling

	Type RS6808 20V 7/7W BA20d
	Ordering – No. 46808
Product Description	Signaling Lamp
Features	Double Filament
Applications	Railway Signal

Drawing (in mm)

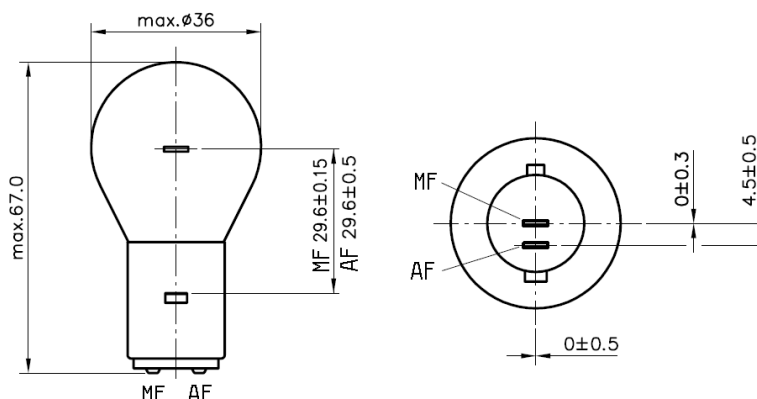

Technical Details

Type	RS6808	
Rated Voltage (V)	20	
Wattage (W) (MF/AF)	(at 0,35A)	max. 7,7 / 7,7
Luminous Flux (lm) (MF/AF)	(at 0,35A)	55 / 55
Average Lifetime (h) (MF/AF)	(at 0,35A)	600 / 50
Base	BA20d	
Maximum Overall Length (mm)	max. 67,0	
Bulb Diameter (mm)	max. 36,0	
Light Center (mm)	MF	29,6 ± 0,15
	AF	29,6 ± 0,5
Filament Distance (mm)	4,5 ± 0,5	
Packaging Configuration	200 pcs.	
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".	

valid from	18.02.2014—V1—PN14/0072
replace for	28.01.2013—V1
file	46808.100.pdf