




Railway Signaling

	Type RS6811 12V 10/10W BA20d
	Ordering – No. 46811
Product Description	Signaling Lamp
Features	Double Filament
Applications	Railway Signal

Technical Details

Type	RS6811	
Rated Voltage (V)	12	
Wattage (W) (MF/AF)	(at 0,85A)	max. 11,0 / 11,0
Luminous Flux (lm) (MF/AF)	(at 0,85A)	140/140
Average Lifetime (h)(at 0,85A) (MF/AF)		600/50
Base	BA20d	
Maximum Overall Length (mm)	max. 67,0	
Bulb Diameter (mm)	max. 36,0	
Light Center (mm)	MF	29,6 ± 0,15
	AF	29,6 ± 0,5
Filament Distance (mm)	MF-AF	2,5 ± 0,5
Packaging Configuration	200 pcs.	
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".	

Drawing (in mm)

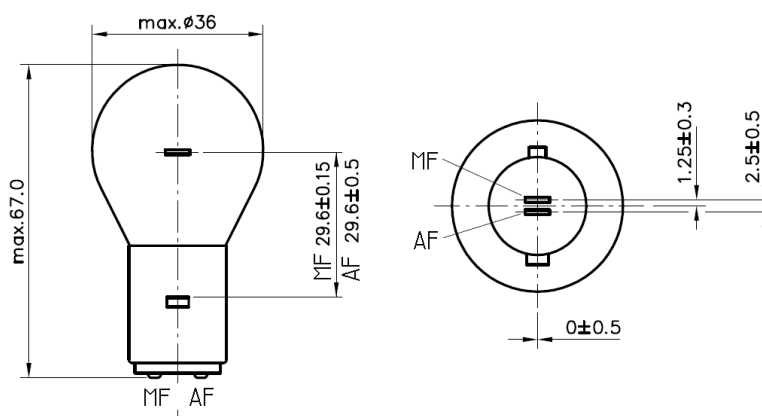

valid from	04.03.2014—V2—PN14/0072
replace for	28.01.2013—V1
file	46811.100.pdf