




Railway Signaling

	Type RS6840 40V 20W BA20s
	Ordering – No. 46840
Product Description	Signaling Lamp
Features	Single Filament
Applications	Railway Signal

Technical Details

Type	RS6840
Rated Voltage (V)	40
Wattage (W) (at 0,5A)	max. 22,0
Luminous Flux (lm) (at 0,5A)	200 - 5%
Lumen Maintenance (at 0,5A)	80% at 300h
Average Lifetime (h) (at 0,5A)	600
Base	BA20s
Maximum Overall Length (mm)	max. 67,0
Bulb Diameter (mm)	max. 36,0
Light Center Length (mm)	29,6 ± 0,6
Packaging Configuration	200
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

Drawing (in mm)

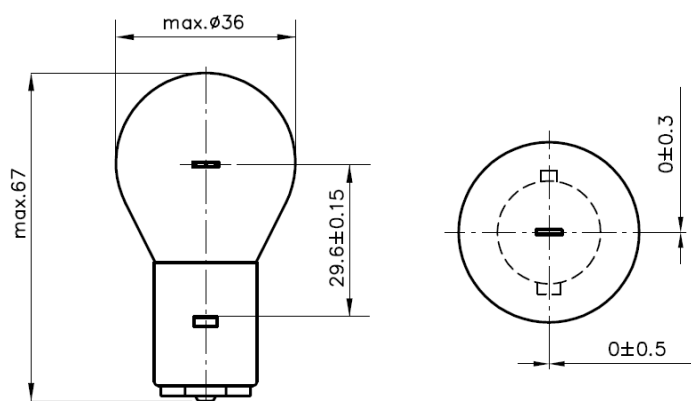

valid from	04.03.2014—V2—PN14/0072
replace for	28.01.2013—V1
file	46840.100.pdf