




Railway Signaling

	Type RS6852 12V 30/30W BA20d
	Ordering – No. 46852
Product Description	Signaling Lamp
Features	Double Filament
Applications	Railway Signal

Drawing (in mm)

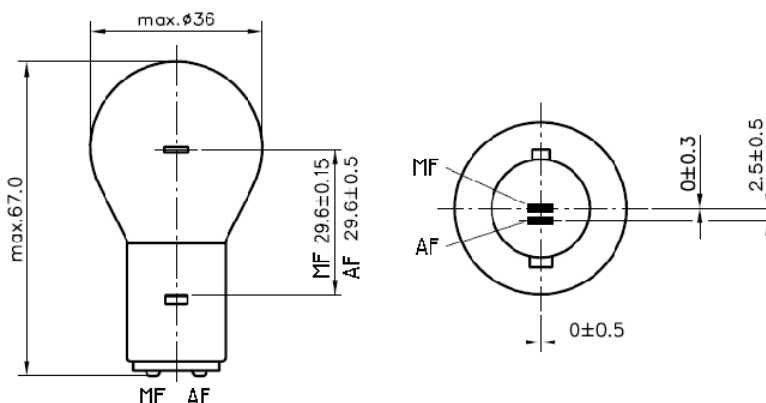

Technical Details

Type	RS6852
Rated Voltage (V)	12
Wattage (W) (at 2.5A) (MF/AF)	max. 33,0 / 33,0
Luminous Flux (Lm) (at 2,5A) (MF/AF)	520 / 520
Lumen Maintenance (at 2,5A)	80% at 4500 h
Average Lifetime (h) (at 2,5A) (MF/AF)	6000 / 200
Base	BA20d
Maximum Overall Length (mm)	max. 67,0
Bulb Diameter (mm)	max. 36,0
Light Center (mm) (MF) (AF)	29,6 ± 0,15 29,6 ± 0,5
Filament Distance (mm)	2,5 ± 0,5
Packaging Quantity	200 pcs.
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

valid from	04.03.2014—V2—PN14/0072
replace for	28.01.2013—V1
file	46852.100.pdf