




Railway Signaling

	Type RS6921 30V 15/15W BA20d
	Ordering – No. 46921
Product Description	Signaling Lamp
Features	Double Filament
Applications	Railway Signal

Drawing (in mm)

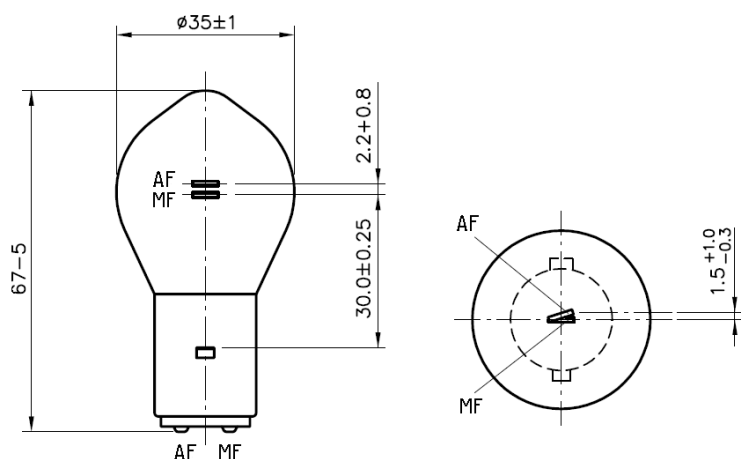

Technical Details

Type	RS6921
Rated Voltage (V)	30
Wattage (W) (MF/AF) (at 30V)	max. 16,5/ 16,5
Luminous Flux (lm) (at 30V) (MF/AF)	155 / 155 -10%
Lumen Maintenance (at 30V) (MF/AF)	75% at 450 h
Life (h) (MF/AF) (at 30V)	600 / 50
Base	BA20d
Maximum Overall Length (mm)	67,0 -5,0
Bulb Diameter (mm)	35,0 ± 1,0
Light Center Length (mm) (MF)	30,0 ± 0,25
Filament Distance (MF-AF)	2,2 ± 0,8
Packaging Configuration	200 pcs.
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

valid from	28.04.2017—V3—PN17/0183
replace for	04.03.2014—V2—PN14/0072
file	46921.100.pdf