




Railway Signaling

	Type RS6942 50V 25/25W BA20d
	Ordering – No. 46942
Product Description	Signaling Lamp
Features	Double Filament
Applications	Railway Signal

Technical Details

Type	RS6942
Rated Voltage (V)	50
Wattage (W) (at 50V) (MF/AF)	max. 26,8 / 26,8
Luminous Flux (lm) (at 50V) (MF/AF)	255 / 255 -10%
Lumen Maintenance (at 50V) (MF/AF)	75% at 450 h
Average Lifetime (h) (at 50V) (MF/AF)	600 / 50
Base	BA20d
Maximum Overall Length (mm)	67,0 -5,0
Bulb Diameter (mm)	35,0 ± 1,0
Light Center (mm) (MF)	30,0 ± 0,25
Filament Distance (mm) (MF-AF)	2,2 ± 0,8
Packaging Configuration	200 pcs.
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

Drawing (in mm)

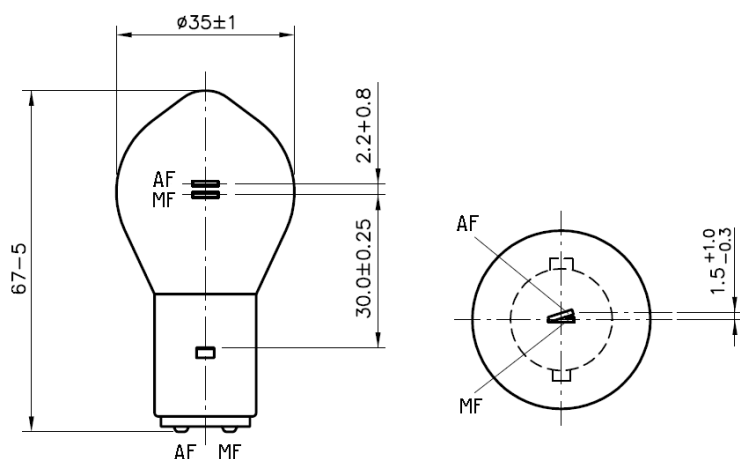

valid from	04.03.2014—V2—PN14/0072
replace for	28.01.2013—V1
file	46942.100.pdf