




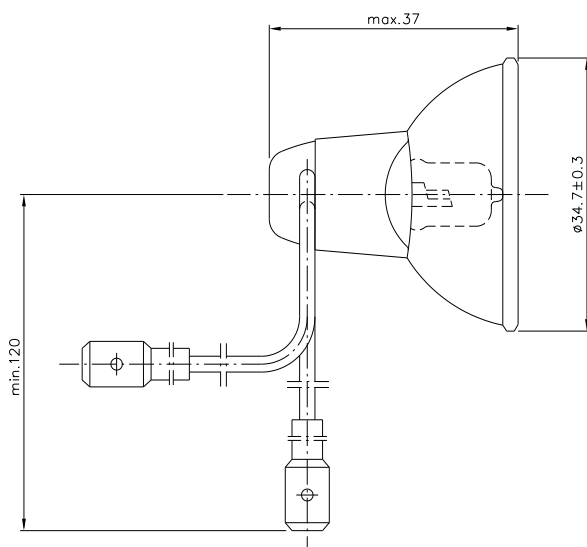
Airfield Halogen Dichroic Reflector

| | |
|---|---|
|  | Type 6104 6,6A 40W cable flat male |
| | Ordering – No. 58303 |
| Product description | Halogen Airfield Lamp with integrated reflector |
| Features | high and constant lumen output, long lifetime, excellent optical adjustment, strong focus light |
| Applications | Approach and threshold lights Runway and taxiway lights Airport Signs Stop bar and touchdown zone lights |

Technical Details

| | |
|--|---|
| Rated current (A) | 6,6 |
| Wattage (W) | 40 +/- 10% |
| Axial Light Intensity (kcd) | min. 10,5 |
| Reflector type | MR11 |
| Average lifetime (hours) | 1500 |
| Base | flexible cable |
| Cable connector | flat male according DIN 46248 |
| Cable length (mm) | min. 120 |
| Maximum Overall Length (mm) | max. 37 |
| Reflector Diameter (mm) | 34,7 +/-0,3 |
| Maximum allowed cable temperature (°C) | 250 |
| Maximum allowed pinch temperature (°C) | 350 |
| Filament Type | C-8 |
| Burning Position | S90 |
| Chromaticity | within white boundaries |
| Packaging quantity | 100pcs. |
| Environmental remark | Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment". |

Drawing (in mm)



| | |
|-------------|-------------------------|
| valid from | 05.03.2014—V2—PN14/0072 |
| replace for | 29.01.2013—V1 |
| file | 58303.100.pdf |