



Airfield Halogen Prefocus



Type 6139 LL HTR
6,6A 200W PK30d female


Ordering - No.
58371

Product description	Halogen Airfield Lamp with prefocus base
Features	high and constant lumen output, long lifetime, excellent optical adjustment, cement free prefocus base
Applications	Approach and threshold lights, Runway and taxiway lights, Stopbar and touch-down zone light visual approach slope indicator systems (e.g. PAPI) Airport signs

Technical Details

Rated current (A)	6,6
Wattage (W)	200 ± 10 %
Luminous flux (lm)	4800 ± 10 %
Lumen maintenance	min. 95 % after 1500 h
Average lifetime (hours)	2000
Base	PK30d
Cable connector	flat female according DIN 46247
Cable length (mm)	min. 120
Maximum Overall Length (mm)	max. 57
Bulb Diameter (mm)	max. 13,5
Light Center Length (mm)	20,0 +/-0,35
Maximum allowed cable temperature (°C)	250
Maximum allowed pinch temperature (°C)	400
Filament Type	CC-6
Burning Position	S90
Chromaticity	Within white boundaries
Packaging quantity	100 pcs.
Environmental remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

Drawing (in mm)

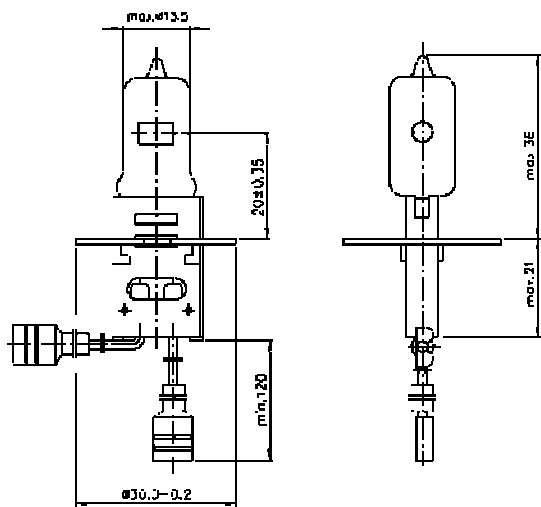

valid from	22.09.2016 -V1 - PN16/0319
replace for	-
file	58371.100.pdf