



Airfield Conventional Prefocus




Type 7670C
6,6A 200W P28s
Ordering – No.
67860

| | |
|----------------------------|--|
| Product description | Conventional incandescent Airfield Lamp |
| Features | lamp for constant current regulated series circuits |
| Applications | Approach lights Threshold lights Runway lights Taxiway lights Obstruction lights |

Technical Details

| | |
|-----------------------------|---|
| Rated current (A) | 6,6 |
| Wattage (W) | 200 |
| Luminous flux (lm) | 4600 |
| Lumen maintenance | 90% after 1500 h |
| Average lifetime (hours) | 200 |
| Base | P28s |
| Maximum Overall Length (mm) | max. 103 |
| Bulb Diameter (mm) | max. 61 |
| Light center length (mm) | 44,5 ±0,5 |
| Filament Type | CC-6 |
| Burning Position | S |
| Chromaticity | Within white boundaries |
| Packaging quantity | 50 |
| Environmental remark | Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment". |

Drawing (in mm)

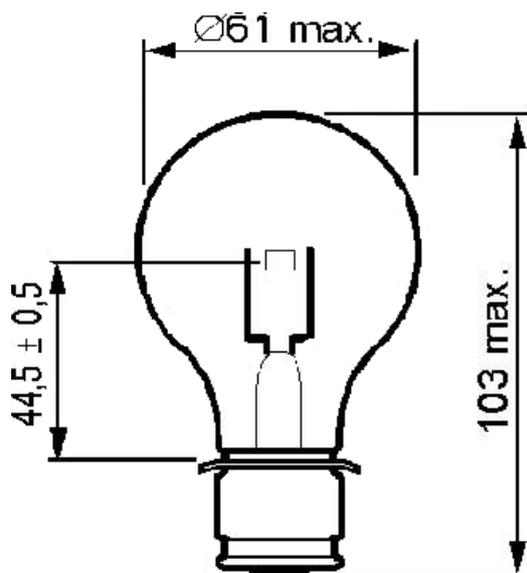

| | |
|-------------|-------------------------|
| valid from | 05.03.2014—V2—PN14/0072 |
| replace for | 22.02.2013—V1 |
| file | 67860.100.pdf |