



Torch



HPR50
5,2V 0,85A PX13,5s

Ordering - No.
68002

Product Description

Halogen Miniature Lamp with Prefocus Base


Features

Hardglass Bulb, small Dimensions, high Shock Resistance

Applications

Flashlight

Drawing (in mm)

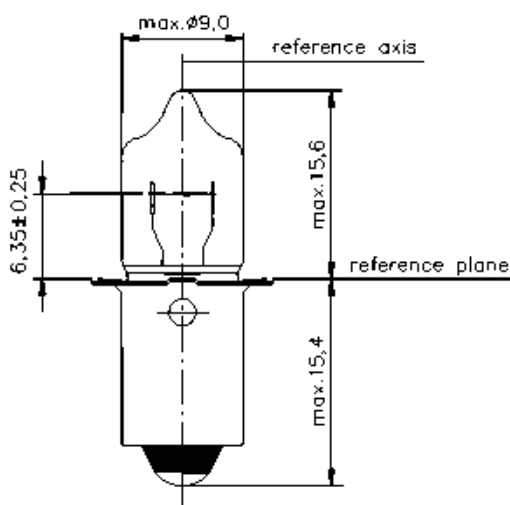

Technical Details

ANSI	HPR50
Rated Voltage (V)	5,2
Current (A)	max. 0,91
Luminous Flux (lm)	85 ± 10%
Lifetime T50 (h)	25
Base	PX13,5s
Bulb Diameter (mm)	max. 9,0
Light Center Length (mm)	6,35 ± 0,25
Bulk Package	1000 pcs.
Tenway Package	200 pcs.

valid from 05.03.2014—V2—PN14/0072

replace for 22.02.2013—V1

file 68002.100.pdf