
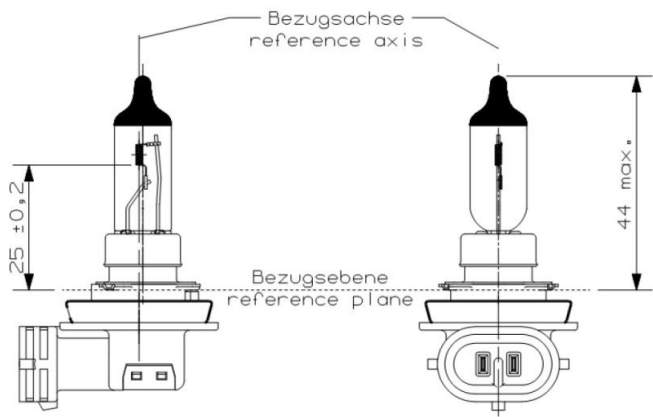


GENERAL

	H11 LLT 12V 55W PGJ19-2 Long Lifetime	Features	original equipment manufacturer quality, black top color, green cover plate, hardglass, UV-cut
	Ordering Number 27078	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, fog light

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 62W @13,2V max. 59W @12,8V	
Base	PGJ19-2	Operating Conditions	burning position: horizontal, long electrode above filament
Geometry	Light center length: 25mm ± 0,2mm Bulb diameter: max. 12,5mm	Luminous Flux	1350 lm ± 10% @13,2V 1250 lm ± 150lm @12,8V
Lifetime	B3: 1000h @13,2V Tc: 2000h @13,2V		

DELIVERY DETAILS

Packaging	Industrial Packaging: 140pcs. (4×35) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 14.08.2017

replace for 06.07.2016-V2-PN16/0245

file 27078 - H11 LLT 12V 55W PGJ19-2.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com