
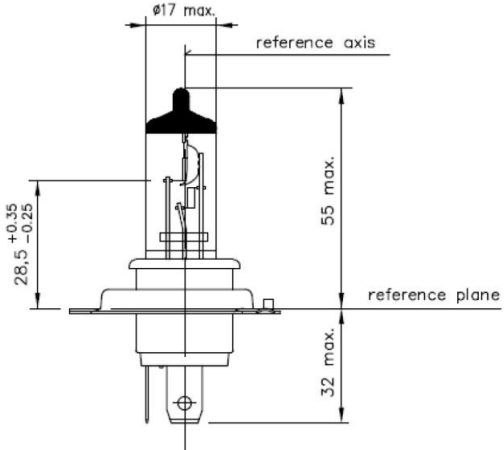


GENERAL

	H4 +150 12V 60W/55W P43t +150 More Light	Features	original equipment manufacturer quality, high luminance, silver top color, quartzglass, UV-cut
	Ordering Number 27491	Standard	ECE R37
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 75W/68W @13,2V	
Base	P43t		
Operating Conditions	light-up position: horizontal		
Luminous Flux	1650/1000 lm \pm 15% @13,2V		
Geometry	Light center length: 28,5mm +0,35mm/-0,25mm Bulb diameter: max. 17mm	Lifetime	B3: 125/125h @13,2V Tc: 250/250h @13,2V

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 100pcs. (10x10x1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 01.06.2023-PN23/0105

replace for 19.03.2020

file 27491 - H4 +150 12V 60W/55W P43t.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.