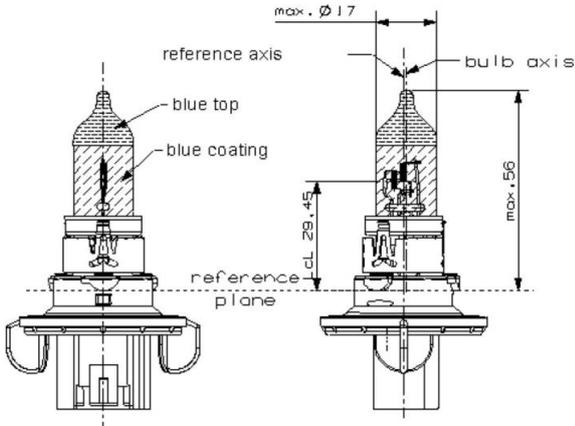


GENERAL

	H13C BLUE 12V 60W/55W P26,4t 9008 BLUE Blue Version	Features	original equipment manufacturer quality, bright white light, blue top color, blue coating, color temperature up to 4000K, hardglass, UV-cut
	Ordering Number 27692	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 75W/68W @13,2V max. 70W/60W @12,8V	
Base	P26,4t	Operating Conditions	burning position: horizontal
Geometry	Light center length: 29,45mm Bulb diameter: max. 17mm	Luminous Flux	1700/1100 lm ± 15% @13,2V 1500/1000 lm ± 15% @12,8V
Lifetime	B10: 100/150h @14,0V B50: 150/320h @14,0V Tc: 160/340h @14,0V		

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (8x25) Commercial Box Packaging: 100pcs. (10x10x1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 21.11.2017

replace for 12.04.2017

file 27692 - H13C BLUE 12V 60W/55W P26,4t.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.