
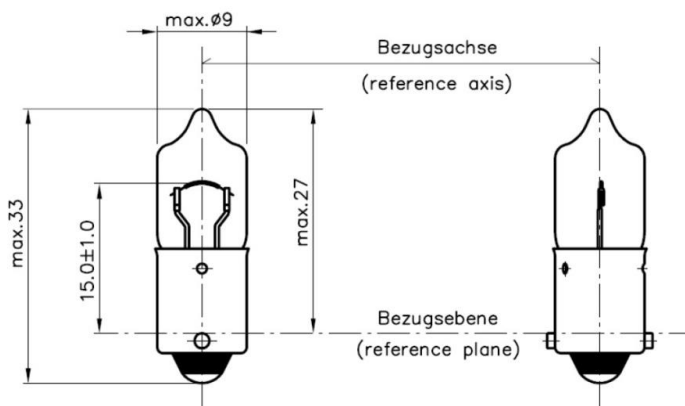


GENERAL			
	<b>H20W</b> <b>12V 20W BA9s</b>	<b>Features</b>	original equipment manufacturer quality, lead free soldered bottom contact, hardglass, UV-cut
	<b>Ordering Number</b> 38835	<b>Standard</b>	not regulated
<b>Product Description</b>	halogen interior lamp	<b>Typical Applications</b>	interior light

TECHNICAL DETAILS			
		<b>Rated Voltage</b>	12V
		<b>Rated Wattage</b>	max. 23,85W @13,5V
		<b>Base</b>	BA9s
		<b>Operating Conditions</b>	bottom contact temperature max. 200°C
		<b>Luminous Flux</b>	470 lm ± 10% @13,5V
<b>Geometry</b>	Light center length: 15mm ± 1mm Bulb diameter: max. 9mm	<b>Lifetime</b>	B3: 300h @13,5V Tc: 600h @13,5V

DELIVERY DETAILS		
<b>Packaging</b>	Industrial Packaging: 1000pcs. (5×200) Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only. Offroad only.

valid from 12/04/2017

replace for 21.02.2013-V1-PN12/0250

file 38835 - H20W 12V 20W BA9s.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.